


MODEL: R5K HIGH SECURITY STAFF STATION



HSS401

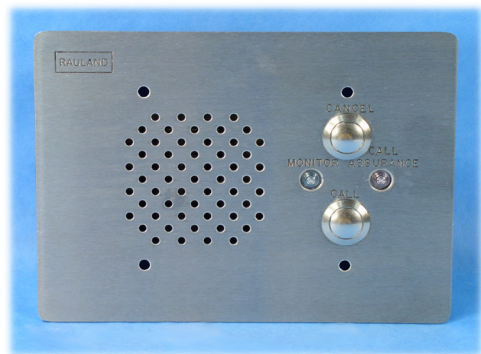

FEATURES

- Vandal-Proof Speaker Mounting Design
- Heavy-Duty Tamper-Proof Call Switch and Cancel Switch
- Monitor LED and call-assurance LED with cancel button
- 11-Gauge Stainless Steel Construction
- Fits Standard 3-Gang Masonry Backbox
- Continuous supervision for station presence
- Plug-in connectors for easy service

SPECIFICATIONS

Power Required: 15.5V DC @ 8mA

Weight: 2.35 lbs. (1.07 kg)

Size: W: 7.50" (19.10 cm)

H: 5.50" (14.00 cm)

D: 2.50" (6.40 cm)

Housing and Finish: 11-gauge brushed stainless steel faceplate

Controls: One (1) Call button, One (1) Cancel button,
One (1) Monitor LED indicator, and
One (1) Call-assurance indicator

Terminations: Plug-on connectors

Backbox Options: Standard (3-3/4" to 3-1/2" deep)
3-gang masonry box

Certification: Designed for compliance to ANSI/UL 1069,
IEC 60950, CE, RoHS / WEEE Compliant. Assembled in a
U.S. FDA Registered facility.

DESCRIPTION

The HSS401 High-Security Staff/Duty Station is a station that allows both patients and staff to place a call to the assigned Console(s) for two-way communication. It is specifically designed for nurse call systems used in high security facilities such as psychiatric wards, correctional institutions or wherever vandalism may be encountered. Calls are initiated by a patient or staff member pushing a momentary "Call" button. With the use of the R5KDCRCS4 Output Relay Module and R5KDC46 Domeless Controller, the HSS400 can have its calls visually annunciated on the CLS103 High Security Corridor and Zone lights.

The HSS401 is virtually indestructible. It is protected externally by an 11-gauge brushed stainless steel faceplate.

The cancel switch of the station is vandal-proof momentary push-button type. A rugged steel actuator activates a momentary switch whose movement is limited by a mechanical stop to prevent damage caused by attempted vandalism. The speaker/microphone is protected against damage.

The station is connected to its associated corridor light or domeless room controller and is continually supervised for station presence. Through programming, a "Trouble" message can annunciate at the associated console(s) when the station is removed from the system.