Model: R4KDLC2 — Dual Lighting Control Module

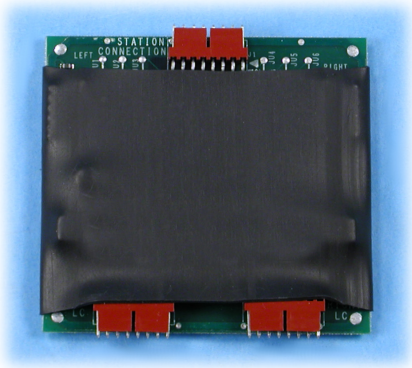

R4KDLC2

Features

- Provides 4 isolated low-voltage outputs (per pillow speaker - per bed) for connection to high-voltage lighting controller
- Pigtail wire connector for easy installation
- Protective shrink-wrapped cover for location in quad wiring boxes

Specifications

Power Required: 15.5V @ 23mA

Size: W: 3.25” (8.26 cm)
H: 3.18” (8.08 cm)
D: 0.5” (1.27 cm)

Controls: 8 Normally Open Active Outputs – 4 per bed

Terminations: Pre-wired pigtail, plug-on connector

Certification: UL/C-UL 1069; CE.

Description

The R4KDLC2 – Dual Lighting Control Module provides total Pillow Speaker isolation for lighting relays (auxiliary device which is non-UL 1069 listed). The R4KDLC2 is associated with the R4K23VA Dual Audio Enhanced Bed Station and the R4K25LV Dual Enhanced Patient Station - Non Speech. The module provides two pre-wired pigtails outputs (low-voltage) to interface with lighting relays on a controller to switch high-voltage on lights.

An R4KDLC2 is required for all Pillow Speakers with lighting control (remote device interface) except when the Pillow Speaker is only interfaced to a UL listed hospital grade television and no other devices.

Associated Equipment

R4K23VA — Audio Dual Patient Station

R4K25LV — Dual Enhanced Patient Station - Non Speech

Pillow Speakers

NCLV120/NCLV240 — High Voltage Light Switch Controller

CCDIN3 — Call Cord

Architect and Engineer (A&E) Specifications available online at: customerconnection.rauland.com
Specifications subject to change without notice

©Copyright 2014 Rauland-Borg Corporation Printed in USA Rev 04/2014

USA-Mt.Prospect, IL • 800-752-7725 • Fax 800-217-0977
Canada • 905-607-2335 • Fax 905-607-3554
www.rauland.com

Rauland-Borg Corporation