


## MODEL: 351000 - BRANCH REGIONAL CONTROLLER

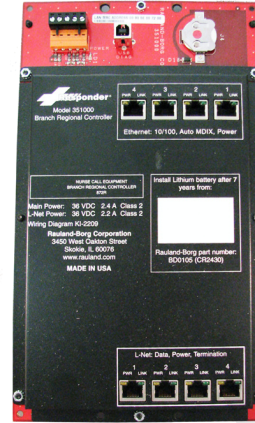

### FEATURES

- Data & audio control for four (4) L-Net connections
- Supports up to ninety-six (96) Corridor Lights and/or Domeless Controllers
- Data, audio, and power for four (4) Ethernet connections
- Supports up to sixteen (16) Nurse Consoles and thirty-two (32) Staff Terminals
- Power over Ethernet (PoE) to the Nurse Consoles and Staff Terminals through any of the four (4) Ethernet ports
- Seventeen (17) LED diagnostic/status LED indicators
- Continuously supervises local consoles, staff terminals, corridor lights, and domeless controllers for power and signal
- Stores local console, staff terminal, corridor light, and station configurations
- RJ connectors for easy service
- Removable power terminal block for easy installation

### SPECIFICATIONS

**Power Required:** Main Power: 36 V DC @ 2.4 A  
Optional L-Net Power: 36 V DC @ 2.2 A

**Weight:** 2.15 lbs. (0.97 kg)  
**Size:** W: 6.60" (16.76 cm)  
H: 11.40" (28.95 cm)  
D: 0.90" (2.28 cm)

**HOUSING AND FINISH:** Black metal enclosure with white nomenclature

**CONTROLS:** Four (4) Ethernet Link LEDs, Four (4) Ethernet Power LEDs  
Four (4) L-Net Link LEDs, Four (4) L-Net Power LEDs, Main Power LED  
**TERMINATIONS:** Four (4) Ethernet connectors (RJ 45), Four (4) L-Net connectors (RJ 45), One (1) power connector (screw terminal)  
One (1) USB diagnostic connector (USB "B")  
**BACKBOX OPTIONS:** Rauland NC2828 Terminal Cabinet or Rauland 351102 Wall Mounting Cabinet

### DESCRIPTION

The Branch Regional Controller is the data, audio, and configuration hub for four (4) L-Net connections to support up to ninety-six (96) corridor lights and / or domeless controllers. The Branch Regional Controller offers the option of directly powering lightly-loaded L-Net runs (up to 0.55 A per run). The Branch Regional Controller is also the data, audio, power, and configuration hub for four (4) Ethernet connections to support up to sixteen (16) nurse consoles and thirty-two (32) staff terminals. Power over Ethernet (PoE) is provided to the Nurse Consoles and Staff Terminals through any of the four (4) Ethernet ports.

The Branch Regional Controller routes bi-directional data and audio to associated consoles, staff terminals, corridor lights, domeless controllers and stations. Configuration information for local consoles, staff

terminals, corridor lights, domeless controllers and stations is contained in the module's memory. All Branch Regional Controller troubleshooting/configuration programming is accessed from a single USB diagnostic port or through an Ethernet connection over a facility's local area network (LAN). To ensure every component of the Responder 5 system is operational the Branch Regional Controller continuously supervises all local consoles, staff terminals, corridor lights, and domeless controllers for both power and signal faults. This information is passed to a network program for monitoring and alerting system status. In the event of a power failure, the battery backup permits the Branch Regional Controller to maintain full operation during the time required to switch to auxiliary power.

## Rauland-Borg Corporation

Architects and Engineers Specifications available on disc. Specifications subject to change without notice.

USA • 800-752-7725 • Fax 800-217-0977  
CANADA • 905-607-2335 • Fax 905-607-3554  
www.rauland.com

MODEL #351000  
05/2008