


MODEL: 351102 - WALL MOUNTING CABINET

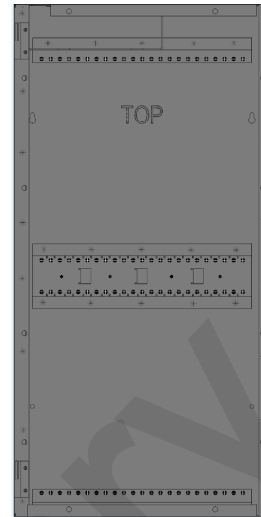

FEATURES

- Flush or surface-mount cabinet
- Removable trim ring
- Front vented door
- Includes conduit knockouts
- Four (4) three-prong power outlets
- Fits in standard stud wall (recessed)

SPECIFICATIONS

SIZE: (with Trim Ring):	W: 16.38" (41.61 cm)	VOLTAGE RATING OF CABINET: 120VAC @ 7.5A
	H: 30" (76.2 cm)	
(w/o Trim Ring):	D: 4.82" (12.24 cm) (including door); 3.75" (9.53 cm) (into the wall)	HOUSING & FINISH: Flat gray metal enclosure
	W: 14.38" (36.53 cm)	
	H: 28" (71.12 cm)	KNOCKOUTS: Sixteen (1/2" to 3/4")
	D: 4.75" (12.07 cm) (including DOOR); 3.75" (9.53 cm) (into the wall)	
		CERTIFICATION: UL/CUL 1069, IEC60601 (all pending)

DESCRIPTION

The Wall Mounting Cabinet is adequate for all Responder head-end equipment. The Wall Mounting Cabinet provides two sets of mounting rails. On the Responder 5 system, the Wall Mounting Cabinet accommodates up to three Power Supplies with Battery Backup, one Branch Regional Controller, and one Responder Ethernet Switch. The front door of the Wall Mounting Cabinet provides ventilation and is secured with a keyed lock (two keys provided with cabinet). Four three-prong power outlets allow for easy connection of the Power Supplies while

sixteen 1/2" to 3/4" conduit knockouts are provided to accommodate flexible routing of system and power conduit. The Wall Mounting Cabinet includes a removable trim ring for either surface or flush mounting. The Wall Mounting Cabinet is designed to fit into a standard 2'x4' (0.6 m x 1.2 m) stud wall on 16" centers.

Rauland-Borg Corporation

Architects and Engineers Specifications available on disc. Specifications subject to change without notice.

USA • 800-752-7725 • Fax 847-679-4106
CANADA • 905-607-2335 • Fax 905-607-3554
www.rauland.com

MODEL #351102
05/2008