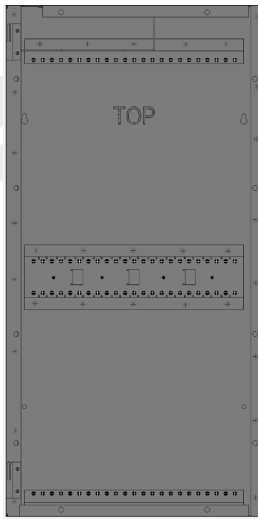


MODEL: 351102 - WALL MOUNTING CABINET

351102

FEATURES

- Flush or surface-mount cabinet
- Removable trim ring
- Front vented door
- Includes conduit knockouts
- Four (4) three-prong power outlets
- Fits in standard stud wall (recessed)

SPECIFICATIONS**Weight:** 32 lbs**Size:** (with Trim Ring):**W:** 16.4" (41.6 cm)**H:** 30.0" (76.2 cm)**D:** 4.8" (12.2 cm) (including door);

3.75" (9.5 cm) (into the wall)

(w/o Trim Ring):

W: 14.4" (36.5 cm)**H:** 28.0" (71.1 cm)**D:** 4.75" (12.1 cm) (including door);

3.75" (9.5 cm) (into the wall)

Voltage Rating of Cabinet: 120VAC @ 7.5A**Housing & Finish:** Flat gray metal enclosure**Knockouts:** Sixteen (1/2" to 3/4")**DESCRIPTION**

The Wall Mounting Cabinet is adequate for all Responder head-end equipment. The Wall Mounting Cabinet provides two sets of mounting rails. On the Responder 5 system, the Wall Mounting Cabinet accommodates up to three Power Supplies with Battery Backup, one Branch Regional Controller, and one Responder Ethernet Switch. The front door of the Wall Mounting Cabinet provides ventilation and is secured with a keyed lock (two keys provided with cabinet). Four three-prong power outlets allow for easy connection of the Power Supplies while sixteen 1/2" to 3/4" conduit knockouts are provided to accommodate flexible routing

of system and power conduit. The Wall Mounting Cabinet includes a removable trim ring for either surface or flush mounting. The Wall Mounting Cabinet is designed to fit into a standard 2'x4' (0.6 m x 1.2 m) stud wall on 16" centers.

*Architect and Engineer (A&E) Specifications available online at: customerconnection.rauland.com
Specifications subject to change without notice*

©Copyright 2009 Rauland-Borg Corporation Printed in USA Rev 09/2009