


**MODEL: 350005 - M-NET DIVIDER MODULE**

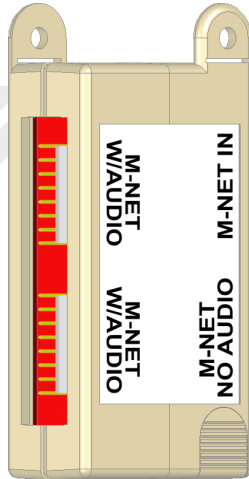

350005

**FEATURES**

- Allows multiple audio and non-audio stations to share a common corridor light or domeless controller
- Plug-on connectors for easy installation and service

**SPECIFICATIONS**

**Power Required:** None

**Weight:** 0.2 lbs (0.8 kg)

**Size: W:** 1.6" (4.0 cm)

**D:** 3.4" (8.7 cm)

**H:** 0.9" (2.2 cm)

**Housing and Finish:** High-impact molded Cyclopol  
2950 UL 94-5VB; light gray

**Controls/Indicators:** Signal connection to Corridor Lights  
for audio capable and non-audio call stations in the room

**Terminations:** Plug-on connectors

**DESCRIPTION**

The M-Net Divider Module is a module that allows multiple audio and non-audio stations to share a corridor light or domeless room controller. Each corridor light and domeless controller has a connection for two audio stations and one non-audio station. In the cases where additional stations need to be wired to the corridor light instead of to the patient station or other button stations, the M-Net Divider Module can support three (3) call-in stations, two (2) of which can have audio capability.

*Architect and Engineer (A&E) Specifications available online at: [customerconnection.rauland.com](http://customerconnection.rauland.com)  
Specifications subject to change without notice*

©Copyright 2012 Rauland-Borg Corporation Printed in USA Rev 08/2012